
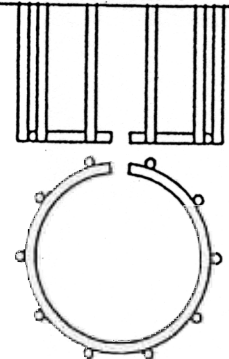
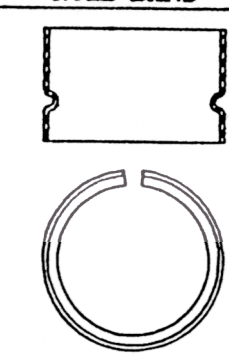
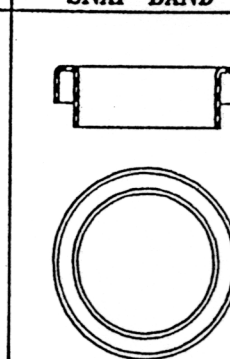
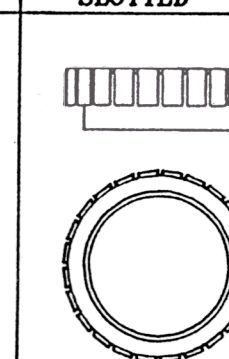
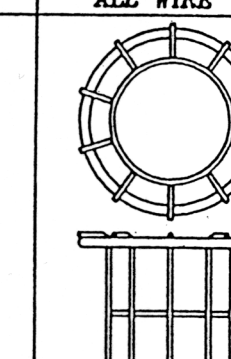


STANDARD CONSTRUCTION SPECIFICATIONS

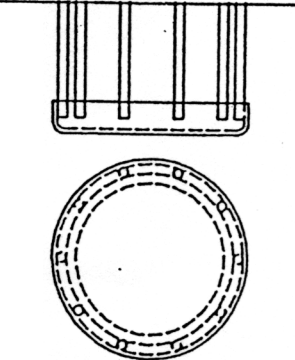
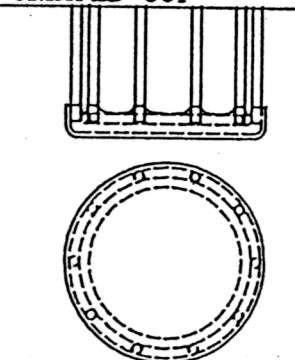
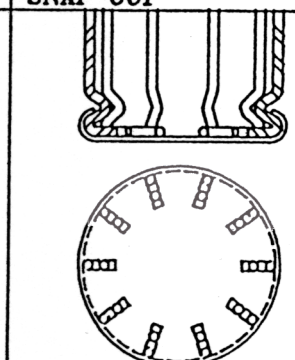
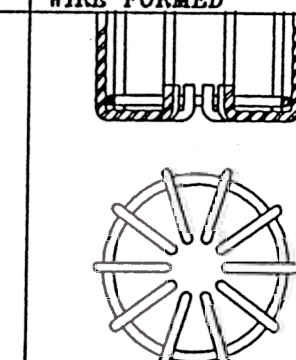
NUMBER OF VERTICAL WIRES

WIRE GA.9-7	WIRE GA.9-7	WIRE GA.11-9	WIRE GA.12-11	WIRE GA.13-11	WIRE GA.13-11
					




CAGE TOPS

SPLIT RING	ROLL BAND	SNAP BAND	SLOTTED	ALL WIRE
				

CAGE BOTTOMS

WELDED CUP	CRIMPED CUP	SNAP CUP	WIRE FORMED
			

WIRE GAUGE FULL SCALE

		7 GA.
		9 GA.
		10 GA.
		11 GA.
		12 GA.
		13 GA.

MATERIALS AND FINISHES AVAILABLE

MATERIALS:

C.R.S.
GALVANIZED STEEL WIRE
304 S.S.
316 S.S.
INCONEL 600 OR 601

FINISHES:

ELECTROSTATIC SPRAY EPOXY
1.5 TO 6 MILS THICK
SERVICE TEMPERATURE 250°F TO 350°F

FLUIDIZED BED EPOXY
8 TO 12 MILS THICK

VINYL 1.5 TO 8 MILS THICK
SERVICE TEMPERATURE 200°F

ZINC .0002 THICK
SERVICE TEMPERATURE 500°F